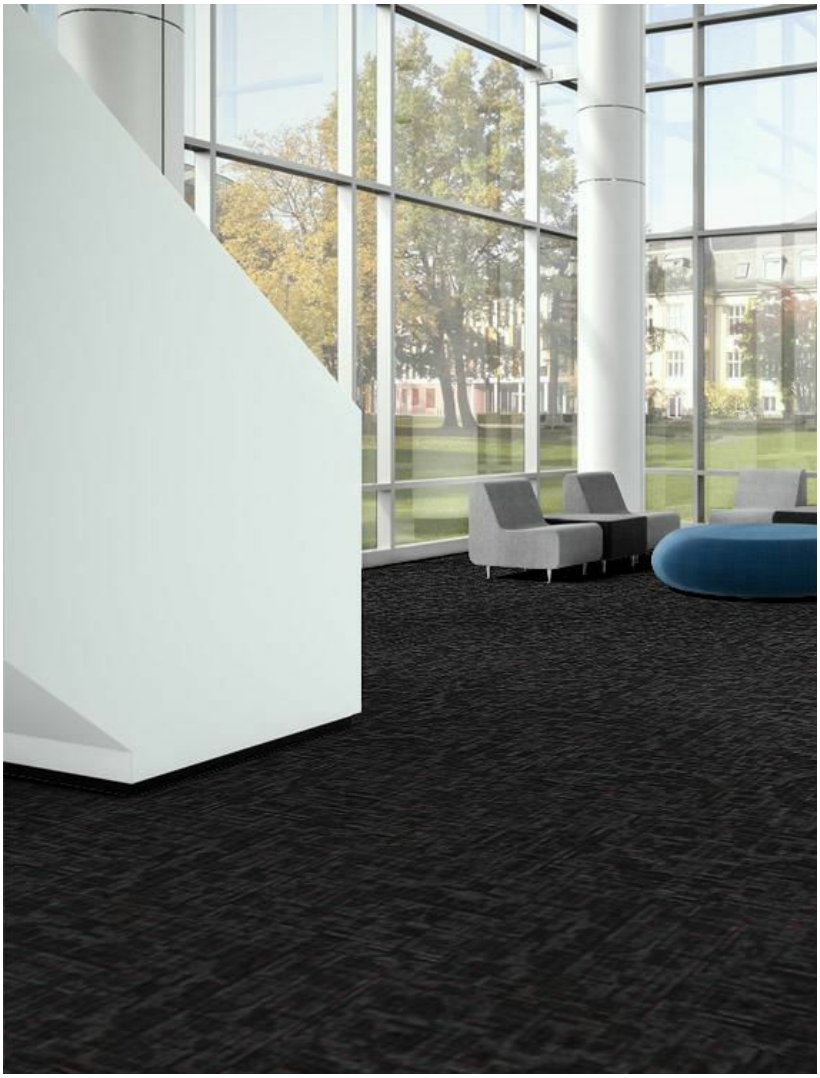

Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	7123 oz./y3 (264.13 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	9.33 stitches/in (3.67 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

MET01 Petal Line


MET02 Gridstone

MET03 Axial


MET04 Framework

MET05 Wild Mist

MET06 Basalt

MET07 Lattice

MET08 Slate


MET09 Canopy

MET10 Drift


MET11 Core



MET12 Base