Quickship


Time Zone

PLANKS








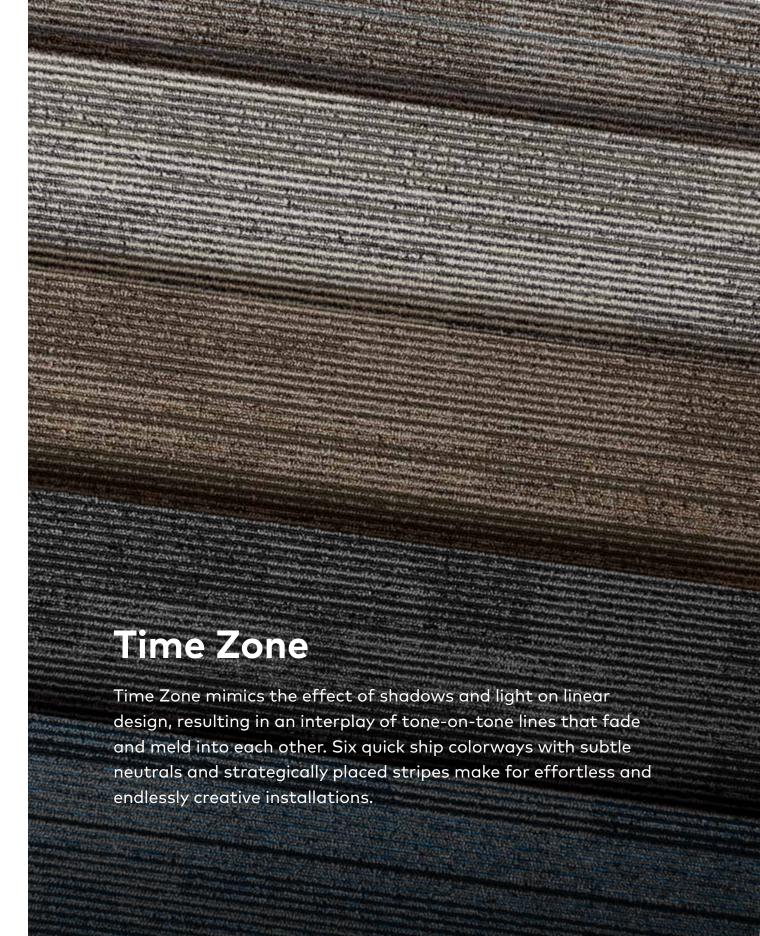





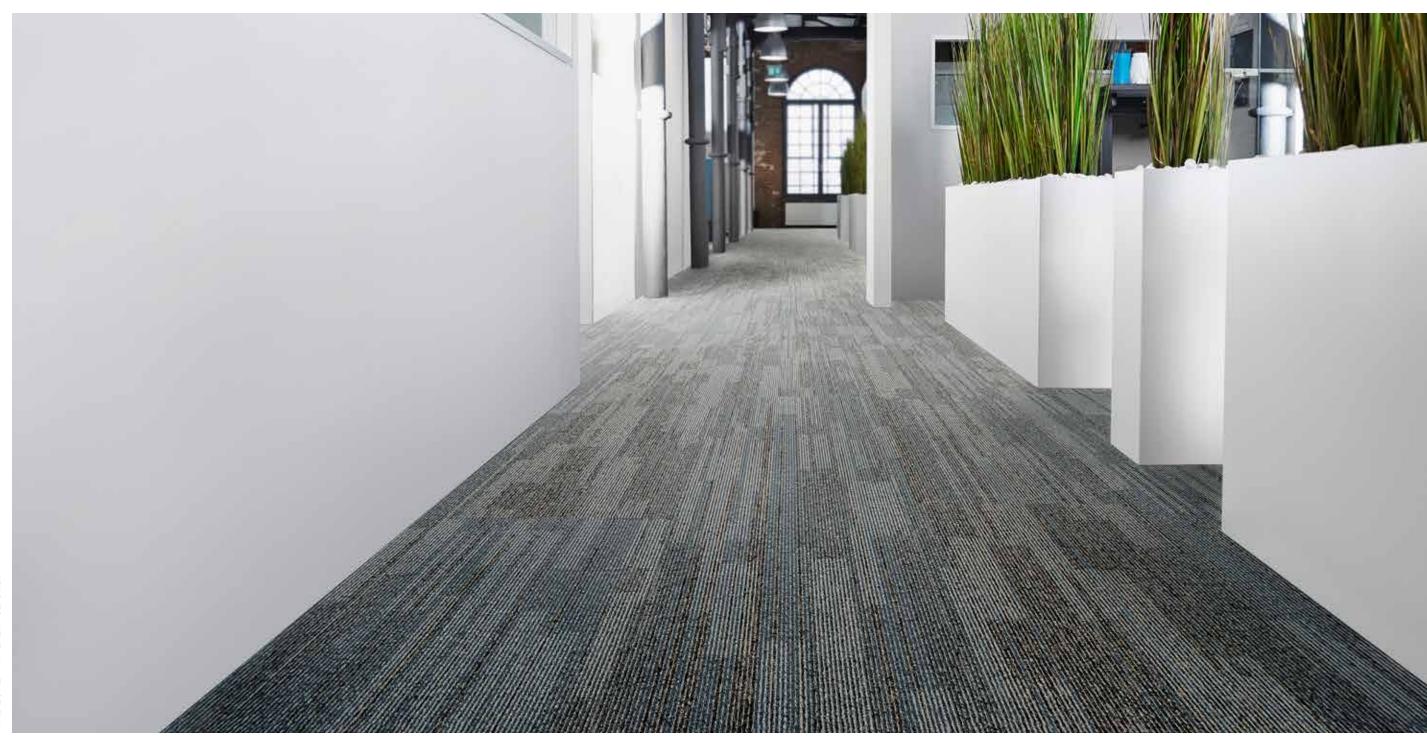



18" X 36" TIME ZONE







TME32 | SOLAR LINEN

TME48 | COSMIC BLUE

TME55 | PYTHIAD SILVER







TME56 | INTERLAPSE GREY

TME59 | JET LAG

TME78 | STANDARD TAN

SIX TILE VARIATIONS WITHIN EACH COLORWAY

A shift in color value is an inherent attribute of this style and is reflected across multiple tiles. Randomizing placement of tiles will ensure a quality installation.





Scan to order samples or check inventory.

Fiber

TERAPLEX SD® is an advanced generation continuous filament PET fiber engineered for today's commercial flooring needs. It was created by leading polymer scientists and utilizes the most advanced PET resin to create carpet fiber with vibrant color, superior fade resistance and long-term performance.

Moisture

Are high levels of moisture in your concrete slab causing issues with your project's floor covering? We can help.

- · Nexus Modular Carpet with TileTabs 99% RH
- Cost-efficient
- · Long-term performance
- Straightforward, easy-to-understand Lifetime warranty
- · Requires no special floor preparation

RH/pH Warranty

Warranty: Installed With TileTabs	Lifetime
Warranty: Installed With Commercialon® Premium Adhesive (non-prorated)	Lifetime
Warranty: Installed With Any Other Adhesive	1 year
Max RH, pH Installed Without Commercialon® Sealer	90% RH, pH 9
Max RH, pH Installed With Commercialon® Premium Sealer	99% RH, pH 11 (TileTabs) — 97% RH, pH 11 (Commercialon)
Max RH, pH: Installed with Commercialon® High Moisture Adhesive	99% RH, pH12

Backings

NEXUS® MODULAR

Nexus modular products can be installed in a variety of ways and are performance engineered to be visually appealing. In addition, they are designed to accommodate your long-term flooring budget.

- Contains pre-consumer recycled content and contributes to LEED
- Recyclable through EF Contract's R4 Carpet **Reclamation Program**

Adhesives

COMMERCIALON® PREMIUM MODULAR ADHESIVE A high-strength acrylic latex-based carpet adhesive specifically formulated for bonding modular PVC backed carpet to the floor. This premium adhesive is for use with all Nexus Modular Tile products. This adhesive is guaranteed for the life of the installation when used in accordance with the EF Contract Carpet Installation Handbook. Commercialon Premium Modular Adhesive meets the CRI Low-VOC Emission Criteria. Commercialon Premium Modular Adhesive is nontoxic, has ultra-low odor and is antimicrobial in the dry state.

Optional

TILETABS

High Tack Adhesive Tabs (modular only)

COMMERCIALON® HIGH MOISTURE ADHESIVE

Technologies

PROTEX® SOIL RELEASE

ProTex is a proprietary soil release technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all EF Contract flooring products.

Optional

PROSEPT® ANTIMICROBIAL

SENTIR® ADVANCED ODOR-BLOCKING TECHNOLOGY





©2023 Engineered Floors LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation. These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not EF Contract's, responsibility.

To learn more, visit:

EFCONTRACTFLOORING.COM

STYLE	TIME ZONE TTME
CONSTRUCTION	PATTERNED SCROLL
FIBER TYPE	TERAPLEX SD® PET
DYE METHOD	SOLUTION DYED
OUNCE WEIGHT	16 OZ / YD2
GAUGE	1/12 IN
BACKING	NEXUS® MODULAR
DENSITY	9,143
TOTAL THICKNESS	0.213
SIZE	18" W X 36" L
PATTERN REPEAT	N/A
FINISHED PILE THICKNESS	.063 INCHES
SPECIAL TECHNOLOGY	PROTEX® SOIL RELEASE
OPTIONAL SPECIAL TECHNOLOGIES	PROSEPT® ANTIMICROBIAL SENTIR® ADVANCED ODOR BLOCKING TREATMENT
PHYSICAL TESTING	FLOORING RADIANT PANEL - (CLASS 1) PILL TEST - (PASSES) SMOKE DENSITY - (LESS THAN 450 FLAMING) STATIC GENERATION -
FIBER WARRANTY	(LESS THAN 3.5 KV) 10 YEAR FIBER PERFORMANCE FOR WEAR (FIBER WILL LOSE NO MORE THAN 10% OF ITS FACE FIBER BY WEIGHT) 10 YEAR FIBER PERFORMANCE FOR STATIC LIFETIME STAIN REMOVAL LIFETIME COLORFASTNESS TO LIGHT AND ATMOSPHERIC CONTAMINANTS
BACKING WARRANTY	LIFETIME FOR TUFT BIND STRENGTH (EDGE RAVEL, YARN PULLS, ZIPPERING) LIFETIME AGAINST DELAMINATION

RECOMMENDED INSTALLATION **METHODS**







LIFETIME DIMENSIONAL STABILITY



→ ↑ ↑ ↑ → ↑ HERRINGRONI

