

Product Specifications

Construction	Cut Pile
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	24 oz./sy (814 grams/m2)
Pattern Repeat	N/A
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Living Spaces Standard Back

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


AB017 Cotton



AB035 Ecru



AB051 Sandstone

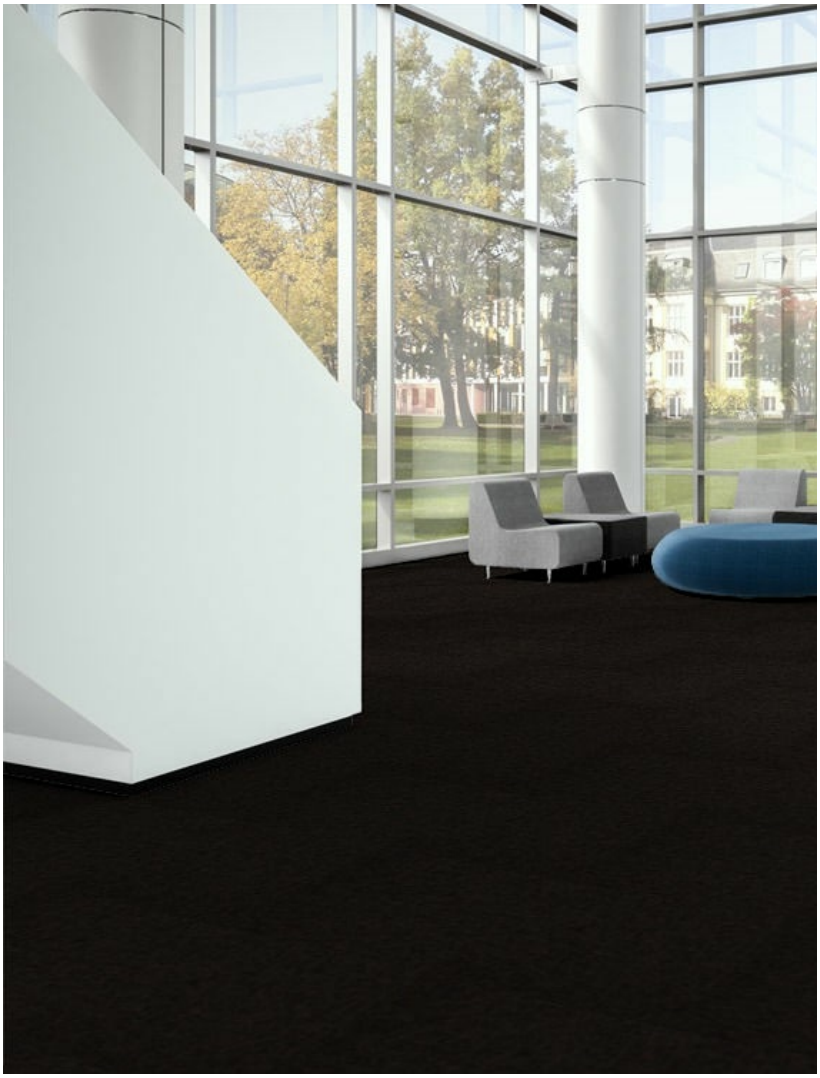

AB053 Honey


AB079 Beige


AB083 Tan


AB092 Linen


AB094 Shadow



Installation Methods: Monolithic, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	30 oz./sy (1017 grams/m2)
Pile Density	8000 oz./y3 (296.65 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



AX302 Procure



AX307 Come In



AX705 Thoroughfare



AX901 Admit



AX903 Channel



AX904 Ingress



Installation Methods: Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9290 oz./y3 (344.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


ALF11 Open Weave


ALF25 Gold Thread


ALF35 Citron Weft



ALF37 Jade Floss



ALF38 Emerald Tack


ALF44 Blue Treadle


ALF48 Navy Braid


ALF53 Silver Warp


ALF55 Grey Bobbin


ALF58 Black Selve...

Alpine | ALP



Product Specifications

Construction	Cut and Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	26 oz./sy (882 grams/m2)
Pattern Repeat	.50" (w) x .75" (l) approx. (1.27cm x 1.91cm)
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Living Spaces Standard Back

Special Technologies

ProTex® Soil Release	Standard

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


ALP15 Soft Beige

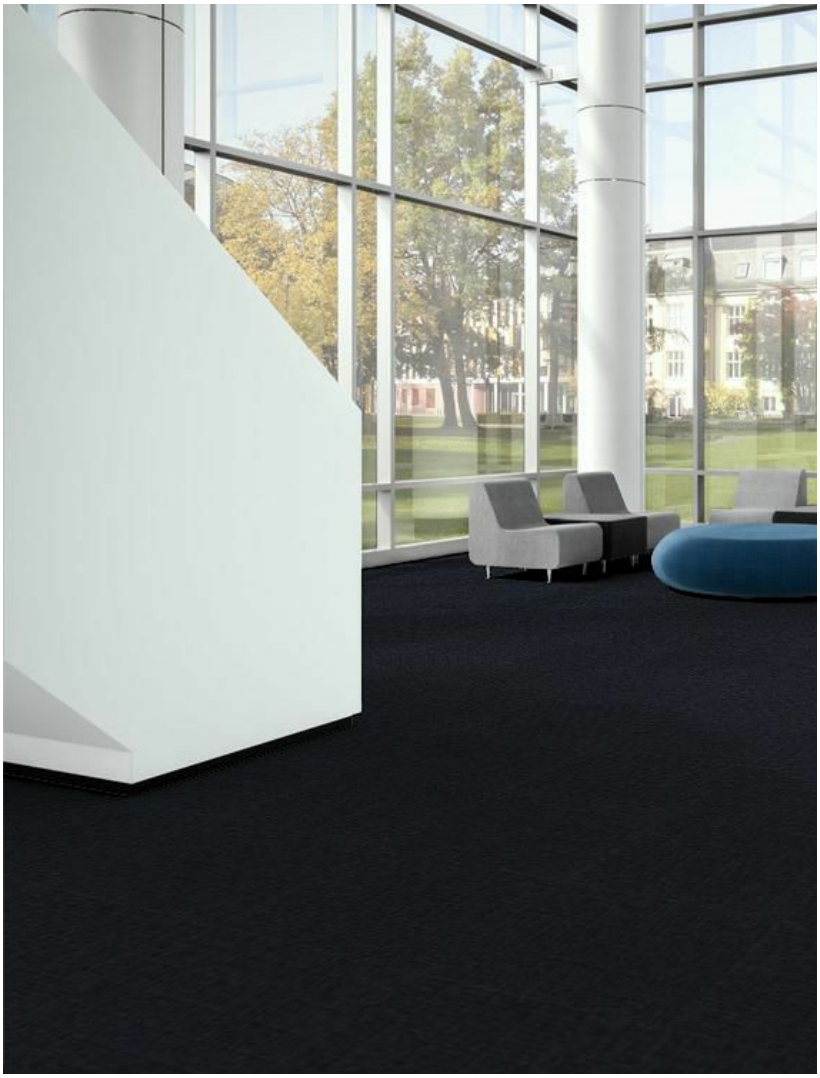

ALP25 Earth


ALP51 Cool Grey


ALP53 Morning Mist


ALP58 Rock


ALP75 Gentle Taupe



Installation Methods: Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon with TeraPlex® SD PET
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	6592 oz./y3 (244.44 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Nylon with TeraPlex SD PET Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	37.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways




ARV44 Blue Moon



ARV56 Flint



ARV58 Ebony



ARV74 Sepia



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6429 oz./y3 (238.39 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways




ART38 Beryl



ART47 Foliage



ART49 Bice



ART56 Moleskin



ART58 Sloe




ART75 Taupe



ART76 Smoke



ART77 Wren



ART98 Damson

Batiste Moderne | BTM



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	8889 oz./y3 (329.61 kg/m3)
Pattern Repeat	18.00" (w) x 24.00" (l) approx. (45.72cm x 60.96cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	50.7%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


BTM24 Peche


BTM35 Bronze



BTM37 Vert


BTM45 Bleu


BTM49 Bleu Marine



BTM52 Argente


BTM54 Acier



BTM56 Gris



BTM58 Noir


BTM72 Beige



BTM78 Marron

Batiste Moderne | TBTM



Installation Methods: Parquet, Herringbone, Basketweave, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	10141 oz./y3 (376.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


BTM24 Peche


BTM35 Bronze



BTM37 Vert


BTM45 Bleu


BTM49 Bleu Marine




BTM52 Argente


BTM54 Acier



BTM56 Gris



BTM58 Noir


BTM72 Beige



BTM78 Marron

kinetex

Cascade | KCSC

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn


Colorways




CSC24 Splash



CSC37 Stream




CSC44 Rill



CSC48 Shower



CSC49 Spill




CSC59 Rapids



CSC74 Rainfall



CSC77 Rush



CSC99 Cataract

Chaparral | EFCCH

LVT



Installation Methods: Ashlar, 1/3 Drop, Herringbone

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random Wood
Edge Treatment	None
Dimensions:	6" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	2 / 36
Weight per piece / carton	2.05 (lbs) / 36.97 (lbs)
Pieces per box	18
Boxes per pallet	60

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



001 Manzanita



002 Chamis



003 Scrub Oak



004 Sumac



005 Sage Brush

kinetex

Chinook | KCNK

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies


Kinetex ProTex®	Standard


Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Installation Methods: Brick, Ashlar, Quarter Turn


Colorways



CNK24 Desert Wind


CNK37 Sea Breeze


CNK44 Fresh Air


CNK48 Winter Wind


CNK49 Wind Swept


CNK59 Windgust


CNK74 Winds of Cha..


CNK77 Gentle Bree..


CNK99 Whirlwind



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	10125 oz./y3 (375.44 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10.3 stitches/in (4.06 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	52.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


CMT14 Golden Intuit...


CMT38 Teal Harmo...



CMT47 Sage Affinity


CMT49 Indigo Spirit


CMT51 Pewter Rap...



CMT56 Platinum B...


CMT58 Graphite Li...


CMT75 Mink Essen...


CMT76 Bark Integr...


CMT77 Obsidian M...


CMT98 Plum Conc...

Common Thread Tile | TCMT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	10800 oz./y3 (400.47 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10.26 stitches/in (4.04 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


CMT14 Golden Intuit...


CMT38 Teal Harmo...



CMT47 Sage Affinity


CMT49 Indigo Spirit


CMT51 Pewter Rap...



CMT56 Platinum B...


CMT58 Graphite Li...


CMT75 Mink Essen...


CMT76 Bark Integr...


CMT77 Obsidian M...


CMT98 Plum Conc...



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus (A)
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7543 oz./y3 (279.70 kg/m3)
Pattern Repeat	6.00" (w) x .63" (l) approx. (15.24cm x 1.60cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	12.7 stitches/in (5.00 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	68.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



CNT22 Standpoint



CNT47 Framework



CNT51 Ambience



CNT52 Relation



CNT54 Perspective



CNT57 Situation



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6750 oz./y3 (250.29 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways




CNL38 Emerald




CNL48 Sapphire



CNL52 Taupe




CNL54 Mineral



CNL56 Gunmetal



CNL58 Anthracite



CNL96 Violet



Product Specifications

Construction	Tip-Sheared Scroll
Backing	PremierBac® Plus (A)
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pattern Repeat	24.00" (w) x 48.00" (l) approx. (60.96cm x 121.92cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11.5 stitches/in (4.53 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	67.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



CSS10 Tatami


CSS32 Tinsel



CSS45 Shadow


CSS47 Barkcloth


CSS48 Denim


CSS52 Grey Twill


CSS55 Stonewash


CSS58 Rattan


CSS72 Knitting Need..


CSS76 Corduroy


CSS77 Tapestry Ta...


CSS86 Shuttle Bro...



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Tip-Sheared Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.83 stitches/in (4.26 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


CSS10 Tatami



CSS32 Tinsel




CSS45 Shadow


CSS47 Barkcloth


CSS48 Denim


CSS52 Grey Twill


CSS55 Stonewash


CSS58 Rattan



CSS72 Knitting Need..



CSS76 Corduroy


CSS77 Tapestry Ta...


CSS86 Shuttle Bro...



Product Specifications

Construction	Patterned Scroll
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	8889 oz./y3 (329.61 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus
Optional Warranties	Endure Plus TitanBac Plus

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	43.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


CWK12 Driftwood



CWK15 Dapple Grey


CWK43 Lark



CWK46 Cobalt




CWK55 Lead



CWK56 Steel



CWK57 Slate


CWK58 Lampblack


CWK75 Acorn

Crosswalk Tile | TCWK



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	10141 oz./y3 (376.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	39.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



CWK12 Driftwood




CWK15 Dapple Grey


CWK43 Lark


CWK46 Cobalt




CWK55 Lead



CWK56 Steel



CWK57 Slate


CWK58 Lampblack


CWK75 Acorn

kinetex

Dart | KDAR

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways

DAR24 Surge

DAR25 Dash

QUICKSHIP

DAR34 Flash

DAR44 Whiz

QUICKSHIP

DAR45 Sprint

DAR49 Hurry

QUICKSHIP

DAR59 Zoom

DAR74 Bolt

DAR76 Gallop

DAR77 Fly

DAR79 Zip

QUICKSHIP

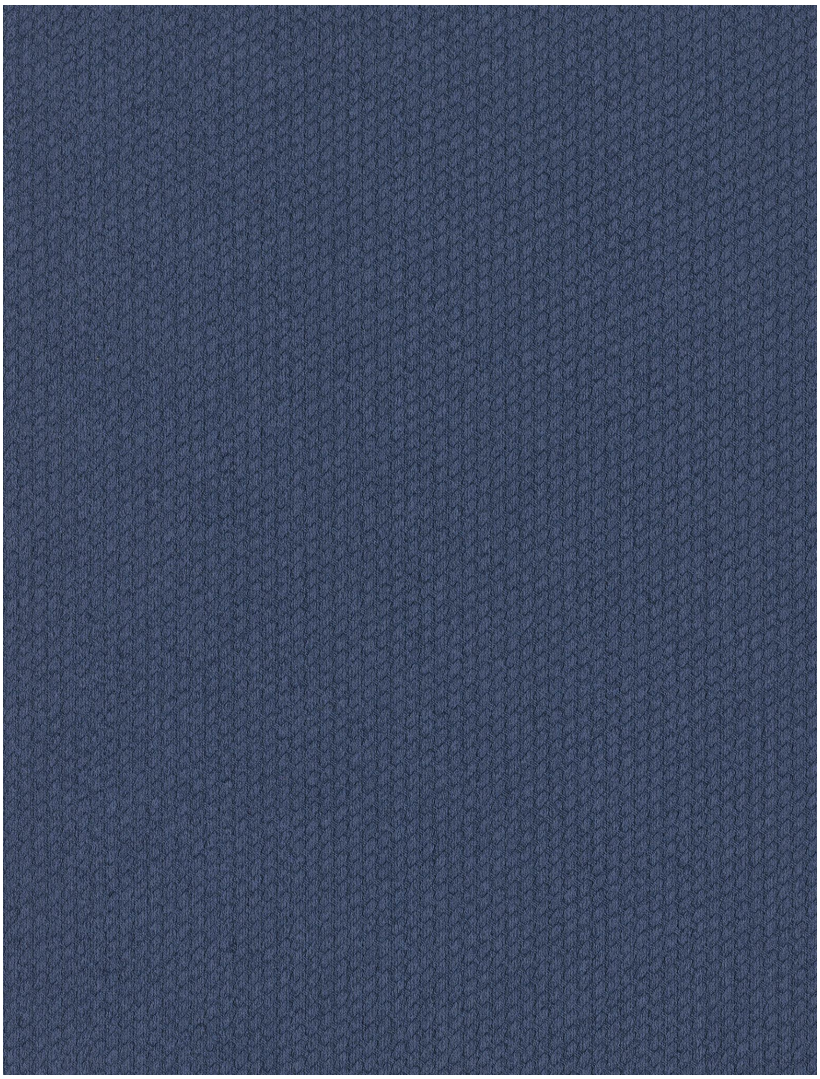
DAR87 Spring

DAR99 Streak

kinetex

Dart Plank | KDAR

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	12" x 48" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies


Kinetex ProTex®	Standard


Environmental Specifications & Tests


Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways


DAR24 Surge



DAR25 Dash



DAR34 Flash



DAR44 Whiz



DAR45 Sprint



DAR49 Hurry



DAR59 Zoom


DAR74 Bolt


DAR76 Gallop


DAR77 Fly


DAR79 Zip


DAR87 Spring


DAR99 Streak

Depart Walk-Off | TDEP



Installation Methods: Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon with TeraPlex® SD PET
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7610 oz./y3 (282.18 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Nylon with TeraPlex SD PET Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	37.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways




DEP45 Teal



DEP57 Pewter



DEP59 Black



DEP75 Bay



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	5874 oz./y3 (217.81 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


DRC45 Stylistic



DRC49 Pattern


DRC51 Decision


DRC54 Audience


DRC59 Author


DRC72 Interior


DRC78 Founder



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	14 oz./sy (475 grams/m2)
Pile Density	5793 oz./y3 (214.81 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	9.7 stitches/in (3.82 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways




DIS39 Verdant




DIS49 Marine



DIS53 Gull




DIS55 Slate



DIS57 Smoke



DIS59 Raven



DIS97 Damson



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	7894 oz./y3 (292.71 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways





DIV12 Social




DIV15 Gadgets


DIV18 Wireless



DIV43 Millennials



DIV46 Youngest



DIV49 Perspective



DIV54 Zoomers


DIV56 Natives


DIV59 Homelander


DIV72 Online

kinetex

Double | KDLE

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies


Kinetex ProTex®	Standard


Environmental Specifications & Tests


Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Installation Methods: Herringbone, Basketweave, Ashlar

Colorways



DLE12 Tenor



DLE15 Accent


DLE24 Surge


DLE28 Voice


DLE34 Flash


DLE58 Melody


DLE59 Music


DLE87 Scarlet Red


DLE99 Streak

kinetex

Dual | KDUL

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies


Kinetex ProTex®	Standard

Environmental Specifications & Tests


Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Ashlar, Quarter Turn


Colorways



DUL12 Apparent




DUL15 Outward




DUL24 Growth




DUL28 Layer




DUL34 Bound




DUL58 Exterior



DUL59 Outside



DUL87 Spring



DUL99 Element



Installation Methods: Parquet, Herringbone, Basketweave, Monolithic, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution / Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7472 oz./y3 (277.07 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12 stitches/in (4.72 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore BCF (with ColorLoc Plus) Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	44.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



ELN36 Patina



ELN45 Milori Blue


ELN52 Shadow


ELN54 Sparrow


ELN56 Anthracite


ELN58 Iron Grey


ELN73 Blonde



Installation Methods: Parquet, Herringbone, Basketweave, Monolithic, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution / Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	6828 oz./y3 (253.19 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore BCF (with ColorLoc Plus) Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	44.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



ESP14 Flaxen


ESP36 Verdigris


ESP45 French Blue


ESP52 Pearl


ESP57 Starry Night


ESP58 Ebony


ESP73 Bronze

EF Contract®

Facet | EFCFC

LVT



Product Specifications

Wear Layer	12 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random Wood
Edge Treatment	None
Dimensions:	7" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Light Commercial
Standard Warranties	7 Year LVT

Packaging

Sq.ft. per piece / carton	2.33 / 42
Weight per piece / carton	2.02 (lbs) / 36.28 (lbs)
Pieces per box	18
Boxes per pallet	50

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


001 Straw


002 Twig


003 Sunglow


004 Autumn Leaf


005 Fossil


006 Barktone


007 Cocoa


008 Suede Grey



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6288 oz./y3 (233.16 kg/m3)
Pattern Repeat	N/A
Gauge	1/8 (3.15 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	46.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



FCS45 Premium



FCS49 Prime


FCS51 Excellent


FCS54 Grade A


FCS59 Quality


FCS72 Classification


FCS78 Five-Star

Flourish Weave | TFLW



Installation Methods: Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9290 oz./y3 (344.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


FLW11 Open Weave



FLW25 Gold Thread


FLW35 Citron Weft


FLW37 Jade Floss


FLW38 Emerald Ta...


FLW44 Blue Treadle


FLW48 Navy Braid


FLW53 Silver Warp


FLW55 Grey Bobbin


FLW58 Black Selve...



Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	9643 oz./y3 (357.57 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.33 stitches/in (4.07 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



FRG11 Ice Chip


FRG24 Gold Flake


FRG38 Teal Shard



FRG47 Blue Tinge


FRG51 Cracked Con...




FRG52 Cinder



FRG54 Grey Wedge



FRG59 Charcoal Bit


FRG84 Red Trace



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	8852 oz./y3 (328.24 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.5 stitches/in (4.13 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways




FRS47 Foliage



FRS49 Bice




FRS55 Riverstone




FRS56 Moleskin



FRS58 Sloe



FRS59 Blackstone



FRS73 Adobe



FRS77 Wren

Highland | HIL



Product Specifications

Construction	Cut Pile
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	32 oz./sy (1085 grams/m2)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Living Spaces Standard Back

Special Technologies

ProTex® Soil Release	Standard

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


HIL15 Soft Beige


HIL25 Earth


HIL51 Cool Grey


HIL53 Morning Mist


HIL58 Rock


HIL75 Gentle Taupe



Product Specifications

Construction	Tip Sheared Loop Pattern
Backing	PremierBac® Plus (A)
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	6803 oz./y3 (252.26 kg/m3)
Pattern Repeat	24.00" (w) x .54" (l) approx. (60.96cm x 1.37cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	67.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


IMM13 Driftwood



IMM23 Ochre


IMM24 Canary


IMM26 Sepia


IMM44 Luminol


IMM45 Squid


IMM53 Quarry


IMM54 Charred


IMM77 Rooted


IMM84 Matador


IMM94 Concord



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Tip Sheared Loop Pattern
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	5838 oz./y3 (216.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24"x24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


IMM13 Driftwood



IMM23 Ochre


IMM24 Canary


IMM26 Sepia


IMM44 Luminol


IMM45 Squid


IMM53 Quarry


IMM54 Charred


IMM77 Rooted


IMM84 Matador


IMM94 Concord

kinetex

Imprint | KIMP

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies

Kinetex ProTex®	Standard


Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Herringbone, Brick, Ashlar

Colorways


IMP16 Umbra


IMP19 Taupe


IMP38 Peat


IMP45 Marine

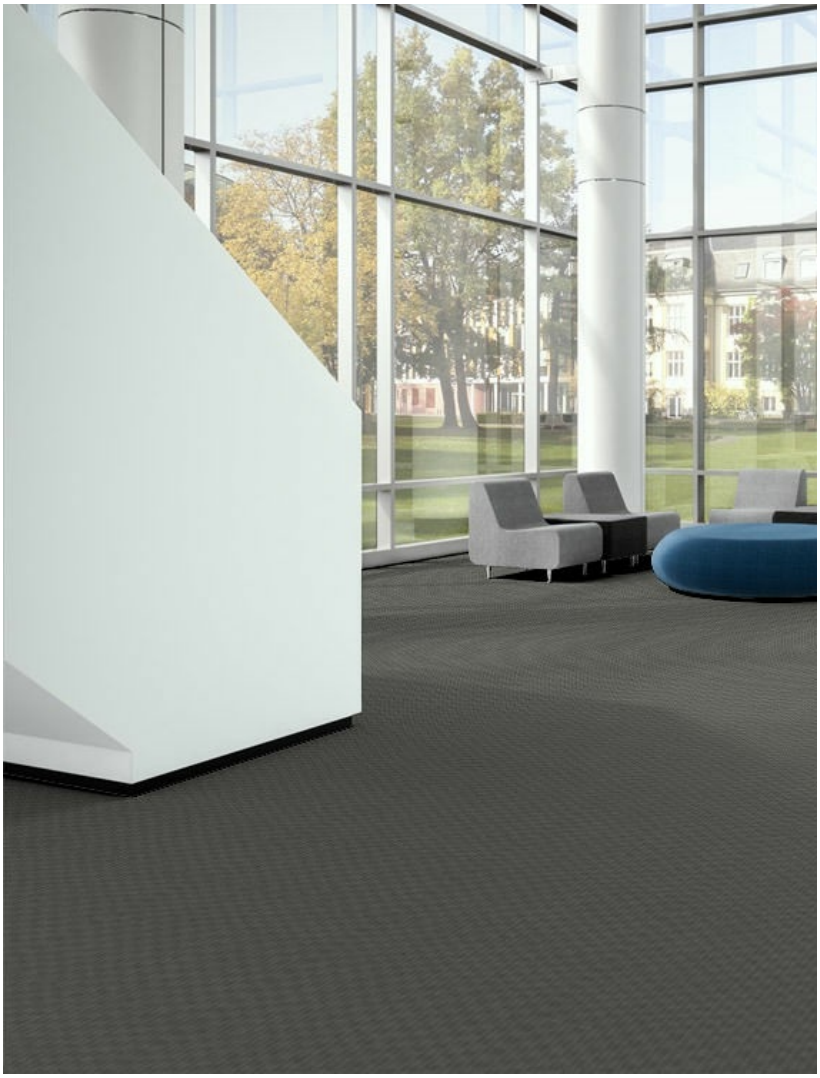

IMP47 Cadet


IMP49 Navy


IMP55 Iron


IMP56 Raven


IMP59 Ink



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus (A)
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7200 oz./y3 (266.98 kg/m3)
Pattern Repeat	2.40" (w) x 1.80" (l) approx. (6.10cm x 4.57cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	13.2 stitches/in (5.20 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	68.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways




INT12 Aspiration



INT15 Resolve



INT45 Endeavour



INT53 Steadfast



INT58 Manifest



INT77 Diligence



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	5897 oz./y3 (218.66 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



INT10 Commutable




INT12 Capable





INT15 Similar



INT16 Replaceable



INT33 Exchange


INT40 Switchable


INT43 Alteration


INT46 Additionally


INT56 Function



INT58 Standardized

kinetex

Intrigue | KITR

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Installation Methods: Brick, Ashlar, Quarter Turn

Colorways



ITR12 Enrapture



ITR15 Fascinate


ITR17 Charm


ITR25 Captivate


ITR35 Allure



ITR45 Mesmerize



ITR47 Attract


ITR55 Transfix


ITR58 Enchant


ITR65 Dazzle


ITR75 Enthrall


ITR85 Tantalize


ITR95 Tempt



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Tip Sheared Loop Pattern
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	12000 oz./y3 (444.97 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



KAS24 Husk



KAS36 Midori



KAS46 Woad



KAS48 Kon


KAS52 Mist


KAS54 Ferrous


KAS56 Kuro


KAS58 Soot


KAS76 Buckthorn



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Tip Sheared Loop Pattern
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9290 oz./y3 (344.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



KM023 Bamboo



KM033 Green Tea



KM045 Indigo


KM047 Mizu


KM051 Silk


KM053 Carbon


KM055 Shiro


KM059 Catalpa


KM075 Cutch



Product Specifications

Construction	Patterned Scroll
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon with TeraPlex® SD PET
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7333 oz./y3 (271.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus Encore SD Nylon with TeraPlex SD PET Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	42%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



LND15 Ring



LND17 Hang UP



LND47 Operator



LND55 Area Code



LND57 Switchboard



LND75 Dial Tone



LND77 Redial



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Tip-Sheared Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7543 oz./y3 (279.70 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.5 stitches/in (4.13 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


LNE12 Fine Point



LNE21 Border



LNE23 Split Rail


LNE35 Timber


LNE52 Pipe


LNE54 In A Row


LNE56 Charcoal


LNE59 Doodle


LNE75 Fuzzy


LNE79 Roof



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Tip-Sheared Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7543 oz./y3 (279.70 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.5 stitches/in (4.13 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



LNA53 Pipe Accent



LNA55 In A Row Acc...



LNA57 Charcoal Acc...

Melange 2.5MM | EFCM2

LVT



Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	9" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	3 / 48
Weight per piece / carton	2.55 (lbs) / 40.78 (lbs)
Pieces per box	16
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



001 Cafe Au Lait



002 Griffin



003 Umber



004 Urban



005 Foggy Beach



006 Phantom



007 Andiron

EF Contract®

Melange 5mm | EFCM5

LVT



Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	Loose Lay 5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	9" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



001 Cafe Au Lait



002 Griffin



003 Umber



004 Urban



005 Foggy Beach



006 Phantom



007 Andiron



Product Specifications

Construction	Cut and Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	25 oz./sy (848 grams/m2)
Pile Density	4056 oz./y3 (150.40 kg/m3)
Pattern Repeat	36.00" (w) x 38.00" (l) approx. (91.44cm x 96.52cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Living Spaces Standard Back


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


MME12 Beige



MME25 Amber

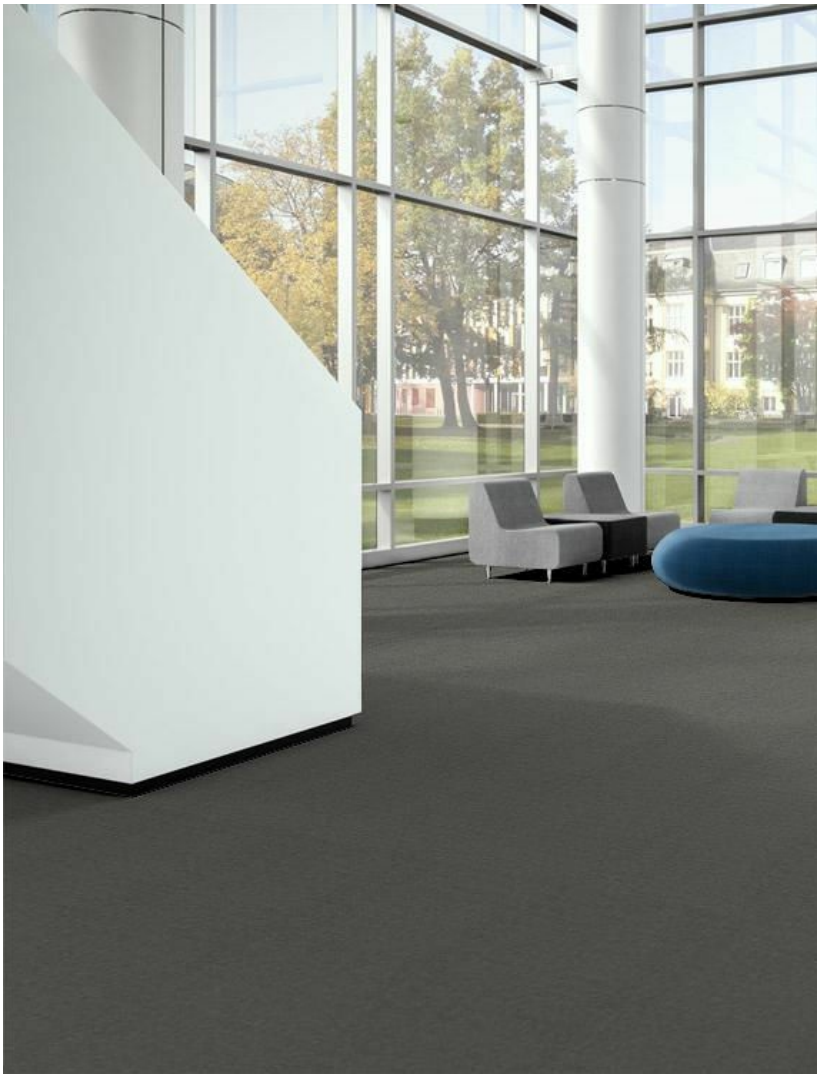

MME53 Pearl


MME55 Dappled


MME57 Walnut


MME74 Tawny


MME76 Chestnut



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	9582 oz./y3 (355.31 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9.33 stitches/in (3.67 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



MCC45 Up-to-date



MCC49 Upscale


MCC51 Novel


MCC54 Beautiful


MCC59 Masterpiece


MCC72 Polished


MCC78 Stylish



Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	27 oz./sy (915 grams/m2)
Pile Density	10340 oz./y3 (383.41 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	43.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways


MUS15 Kelly


MUS24 Porter



MUS28 Newport



MUS40 Armstrong



MUS45 Gilded



MUS47 Engagement



MUS48 Love


MUS50 Sense


MUS53 Grace


MUS56 Play


MUS59 Film


MUS77 Open



Product Specifications

Construction	Tip Sheared Loop Pattern
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	25 oz./sy (848 grams/m2)
Pattern Repeat	6.00" (w) x 13.00" (l) approx. (15.24cm x 33.02cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Living Spaces Standard Back


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



NOV12 Cream



NOV25 Sand


NOV53 Ash


NOV55 Smoke


NOV57 Otter


NOV74 Hazel


NOV76 Sepia



Installation Methods: Parquet, Herringbone, Basketweave, Monolithic, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7024 oz./y3 (260.45 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9.5 stitches/in (3.74 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	41.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


PEN12 Beige


PEN36 Aged Copper


PEN46 Aniline




PEN51 Field Grey



PEN53 Cinder



PEN55 Cadet


PEN57 Raven


PEN59 Blackened



PEN75 Jute



Product Specifications

Construction	Cut Pile
Backing	PremierBac® Plus (A)
Dye Method	Beck Dyed
Fiber Type	Type 6,6 Nylon
Face Weight	36 oz./sy (1221 grams/m2)
Pile Density	6113 oz./y3 (226.67 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	11.33 stitches/in (4.46 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Encore RE & Type 6,6 Nylon Fiber
Optional Warranties	Endure Plus TitanBac Plus

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	49.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

PC610 Blissful Bei...
PC611 Es Tu Ecru
PC612 Almond Roca
PC614 Irish Cream
PC621 Cabana Ban...
PC622 Citrine Cheer
PC624 Gold Metal
PC625 Queen Bee
PC631 Lamplight
PC632 Silver Leaf
PC633 Frog Prince
PC634 Olive Sprig
PC635 Tarragon
PC636 Green Hornet
PC638 Jolly Green G...
PC639 On The Rocks
PC642 Morning Glo..
PC643 Alpine
PC644 Ship To Sho...
PC645 Unreal Teal
PC647 Still Waters
PC649 My Blue Cra..
PC651 Hubcap
PC654 Steel Away
PC656 Outer Space
PC659 Infinity & Bey...
PC672 Basket Case
PC673 Hat Box Bro...
PC674 Mr. Potato He..
PC677 Paw Print
PC679 Chocolate P...
PC684 Rust Away
PC685 See Rock City
PC688 Always Ruby
PC696 Three Wishes
PC699 Perky Purple

EF Contract®

Plateau 2.5mm | EFCP2

LVT



Installation Methods: Herringbone, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 54
Weight per piece / carton	4.11 (lbs) / 49.36 (lbs)
Pieces per box	12
Boxes per pallet	40

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



001 Acier



002 Terra



003 Umbra



004 Zinc



005 Earth

EF Contract®

Plateau 5mm | EFCP5

LVT



Installation Methods: Herringbone, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



001 Acier



002 Terra



003 Umbra



004 Zinc



005 Earth

EF Contract®

Playbook | EFCPB

LVT



Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random Wood
Edge Treatment	None
Dimensions:	7" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	2.33 / 23.33
Weight per piece / carton	4.28 (lbs) / 42.79 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


001 Straw


002 Twig


003 Sunglow


004 Autumn Leaf


005 Fossil


006 Barktone


007 Cocoa


008 Suede Gray


009 Cloud


010 Shadow



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	20 oz./sy (678 grams/m2)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	39.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



PLR39 Nebulae



PLR48 Midnight



PLR54 Constellation



PLR56 Comet



PLR59 North Star



PLR78 Stargaze



Product Specifications

Construction	Cut Pile
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	30 oz./sy (1017 grams/m2)
Pile Density	4462 oz./y3 (165.45 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Living Spaces Standard Back


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



PR012 Ecru



PR025 Flax

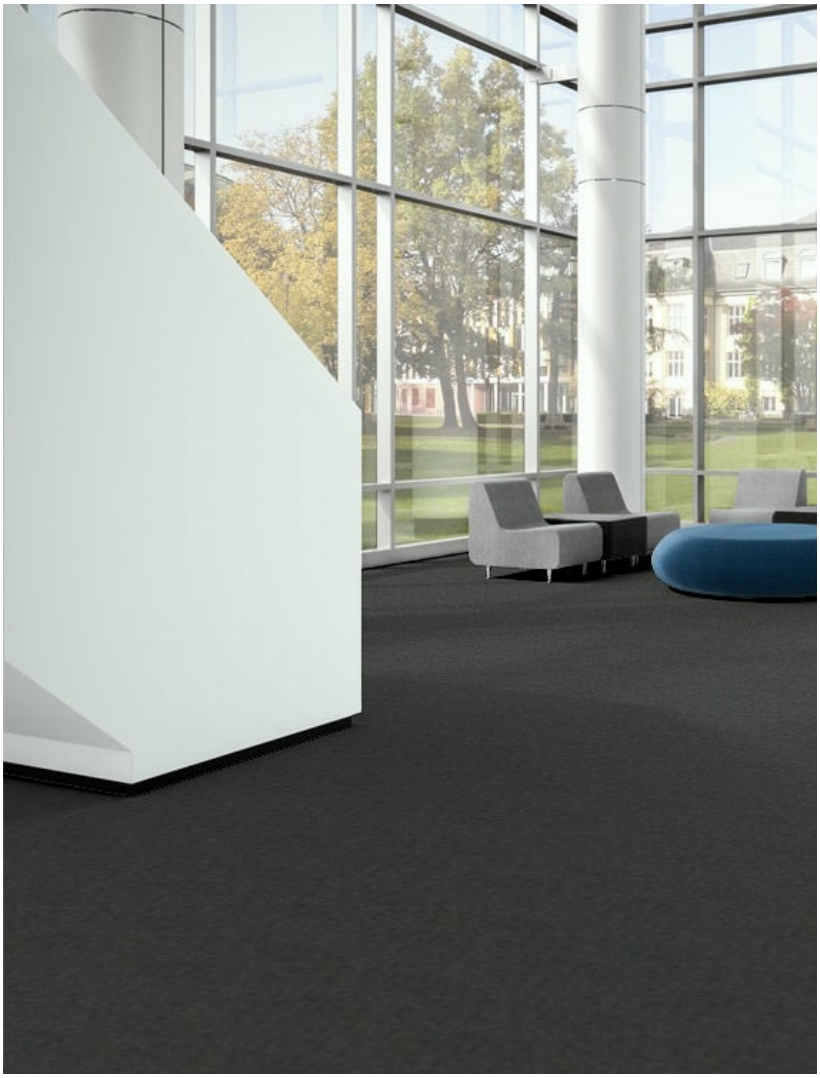

PR053 Dawn


PR055 Stone


PR057 Umbra


PR074 Fawn


PR076 Roan



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET with Encore® SD Nylon
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	5434 oz./y3 (201.50 kg/m3)
Pattern Repeat	.20" (w) x .75" (l) approx. (.51cm x 1.91cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8 stitches/in (3.15 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus TeraPlex® SD PET with Encore® SD Nylon

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways




REM15 Pebble



REM47 Aniline



REM54 Silver Grey



REM55 Cinder



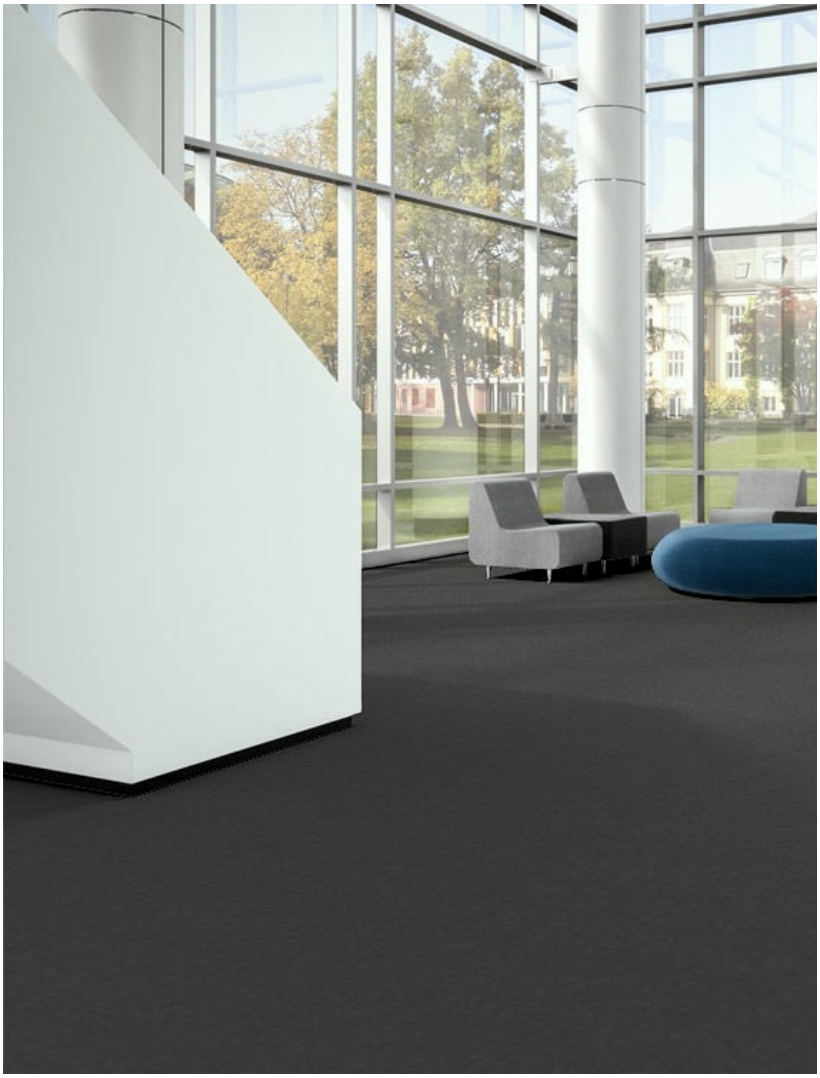
REM56 Dusk



REM58 Charcoal



REM76 Coffee



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET with Encore® SD Nylon
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	8250 oz./y3 (305.92 kg/m3)
Pattern Repeat	N/A
Gauge	1/8 (3.15 rows/cm)
Stitches Per Inch	7.33 stitches/in (2.89 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus TeraPlex® SD PET with Encore® SD Nylon

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	42%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



RMX15 Pebble



RMX47 Aniline



RMX54 Silver Grey



RMX55 Cinder



RMX56 Dusk



RMX58 Charcoal



RMX76 Coffee



Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	27 oz./sy (915 grams/m2)
Pile Density	10125 oz./y3 (375.44 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	43.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



ROM15 Kelly



ROM24 Porter



ROM28 Newport



ROM40 Armstrong



ROM45 Gilded



ROM47 Engagement



ROM48 Love


ROM50 Sense


ROM53 Grace


ROM56 Play


ROM59 Film


ROM77 Open



Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon with TeraPlex® SD PET
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	5468 oz./y3 (202.76 kg/m3)
Pattern Repeat	.96" (w) x .60" (l) approx. (2.44cm x 1.52cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8 stitches/in (3.15 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus Encore SD Nylon with TeraPlex SD PET Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SHU15 Pebble



SHU47 Aniline




SHU54 Silver Grey



SHU55 Cinder



SHU56 Dusk



SHU58 Charcoal



SHU76 Coffee



Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6261 oz./y3 (232.16 kg/m3)
Pattern Repeat	N/A
Gauge	1/8 (3.15 rows/cm)
Stitches Per Inch	11.58 stitches/in (4.56 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	41.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


SIG14 Tan


SIG47 Tungsten


SIG48 Navy Blue



SIG50 Slate




SIG52 Ash


SIG54 Jet


SIG56 Honey Grey



SIG58 Dark Shadow



SIG74 Khaki



Product Specifications

Construction	Patterned Scroll
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9191 oz./y3 (340.81 kg/m3)
Pattern Repeat	24.00" (w) x 32.50" (l) approx. (60.96cm x 82.55cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11.06 stitches/in (4.35 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	50%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SPW12 Linen Reed



SPW13 Khaki Weft


SPW38 Alpine Loom


SPW44 Blue Treadle


SPW49 Midnight B...


SPW53 Silver Warp


SPW55 Grey Bobbin


SPW58 Black Selve...


SPW76 Wildwood T...


SPW77 Graphite He...


SPW98 Currant Shu...

Simple Weave Tile | TSPW



Installation Methods: Herringbone, Brick, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	8471 oz./y3 (314.11 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.6 stitches/in (4.17 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SPW12 Linen Reed



SPW13 Khaki Weft



SPW38 Alpine Loom


SPW44 Blue Treadle


SPW49 Midnight B...


SPW53 Silver Warp


SPW55 Grey Bobbin


SPW58 Black Selve...


SPW76 Wildwood T...


SPW77 Graphite He...


SPW98 Currant Shu...

Sneak Peek 2.5mm | ECSP2

LVT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 54
Weight per piece / carton	4.11 (lbs) / 49.36 (lbs)
Pieces per box	12
Boxes per pallet	40

Special Technologies


Added Antimicrobial	Yes

Environmental Specifications & Tests


Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways




001 Preview



002 Early



003 Secret



004 Showing

EF Contract®

Sneak Peek 5mm | ECSP5

LVT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies


Added Antimicrobial	Yes

Environmental Specifications & Tests


Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways




001 Preview



002 Early



003 Secret



004 Showing



Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	27 oz./sy (915 grams/m2)
Pile Density	9624 oz./y3 (356.86 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	43.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



SOC15 Kelly



SOC24 Porter



SOC28 Newport



SOC40 Armstrong



SOC45 Gilded



SOC47 Engagement



SOC48 Love


SOC50 Sense


SOC53 Grace


SOC56 Play


SOC59 Film


SOC77 Open

kinetex

Sound | KSOU

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways



SOU12 Tenor




SOU15 Accent




SOU28 Voice



SOU54 Pitch




SOU55 Noise




SOU56 Static



SOU57 Note



SOU58 Melody



SOU59 Music



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6894 oz./y3 (255.63 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.33 stitches/in (4.07 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SDF20 Ash


SDF25 Amber



SDF27 Sienna


SDF30 Dolomite



SDF36 Patina



SDF38 Viridian



SDF40 Smoke


SDF45 Azure


SDF48 Indigo


SDF80 Ebony


SDF86 Flame


SDF88 Crimson



Product Specifications

Construction	Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7742 oz./y3 (287.08 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Standard Back Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	25%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2643 Quicksilver



2644 Flash



2645 Whiz



2649 Dash



2652 Lightening



2653 Blue Streak



2654 Rocket



2656 Bolt



Product Specifications

Construction	Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	8587 oz./y3 (318.41 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Standard Back Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	25%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2643 Quicksilver



2644 Flash



2645 Whiz



2649 Dash



2652 Lightening



2653 Blue Streak



2654 Rocket



2656 Bolt

Stained Concrete 2.5mm | EFCSC

LVT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	UV Cured Urethane
Pattern Repeat	Random Stone
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 54
Weight per piece / carton	4.11 (lbs) / 49.36 (lbs)
Pieces per box	12
Boxes per pallet	40

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



00001 Whitewash



00002 Limestone

Stained Concrete 5mm | EFCS5

LVT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20mil
Thickness	5mm
Finish / Coating	UV Cured Urethane
Pattern Repeat	Random Stone
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



001 Whitewash



002 Limestone



Product Specifications

Construction	Tip-Sheared Scroll
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9391 oz./y3 (348.22 kg/m3)
Pattern Repeat	24.00" (w) x 47.30" (l) approx. (60.96cm x 120.14cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11.66 stitches/in (4.59 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Commercialon Premium Broadloom Adhesive PremierBac Plus Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	50%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



STT10 Tatami


STT32 Tinsel



STT45 Shadow


STT47 Barkcloth


STT48 Denim


STT52 Grey Twill


STT55 Stonewash


STT58 Rattan


STT72 Knitting Need..


STT76 Corduroy


STT77 Tapestry Tau..


STT86 Shuttle Bron..



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Tip-Sheared Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	6387 oz./y3 (236.83 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.83 stitches/in (4.26 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



STT10 Tatami


STT32 Tinsel



STT45 Shadow


STT47 Barkcloth


STT48 Denim


STT52 Grey Twill


STT55 Stonewash


STT58 Rattan


STT72 Knitting Need..


STT76 Corduroy


STT77 Tapestry Tau..


STT86 Shuttle Bron..



Product Specifications

Construction	Textured Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5169 oz./y3 (191.67 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	11.33 stitches/in (4.46 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Standard Back Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	25%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SRD13 Sand



SRD14 Glacier



SRD45 Seascape



SRD46 Cadet



SRD53 Dockside




SRD54 Pepper



SRD56 Dorsal



SRD58 Cauldron



SRD59 Carbon



SRD73 Toast



SRD76 Truffle



SRD77 Pinecone



Product Specifications

Construction	Textured Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	5318 oz./y3 (197.19 kg/m3)
Pattern Repeat	N/A
Stitches Per Inch	12.66 stitches/in (4.98 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	Standard Back Encore SD Ultima Fiber
Optional Warranties	Endure Plus TitanBac Plus Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	25%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SRD13 Sand



SRD14 Glacier



SRD45 Seascape



SRD46 Cadet



SRD53 Dockside




SRD54 Pepper



SRD56 Dorsal



SRD58 Cauldron



SRD59 Carbon



SRD73 Toast



SRD76 Truffle



SRD77 Pinecone



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	7249 oz./y3 (268.80 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



SRD13 Sand



SRD14 Glacier



SRD45 Seascape



SRD46 Cadet



SRD53 Dockside




SRD54 Pepper



SRD56 Dorsal



SRD58 Cauldron



SRD59 Carbon



SRD73 Toast



SRD76 Truffle



SRD77 Pinecone

kinetex

Surface | KSUR

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies


Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn


Colorways


SUR12 Apparent



SUR15 Outward



SUR28 Layer



SUR54 Finish


SUR55 Plane


SUR56 Aspect


SUR57 Veneer


SUR58 Exterior


SUR59 Outside



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	7619 oz./y3 (282.52 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways





TSY12 Social




TSY15 Gadgets


TSY18 Wireless



TSY43 Millennials



TSY46 Youngest



TSY49 Perspective



TSY54 Zoomers


TSY56 Natives


TSY59 Homelander


TSY72 Online



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6585 oz./y3 (244.18 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11.8 stitches/in (4.65 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways




TER47 Nightfall



TER52 Strand



TER53 Smoke




TER54 Grayness



TER55 Riverstone




TER56 Shale




TER59 Blackstone



TER73 Adobe



TER76 Earth



TER84 Crimson



Installation Methods: Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	9143 oz./y3 (339.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.2 stitches/in (4.02 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	41.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



TME32 Solar Linen



TME48 Cosmic Blue



TME55 Pythiad Silv...



TME56 Interlapse Gr..



TME59 Jet Lag



TME78 Standard Tan



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex® SD PET
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	6706 oz./y3 (248.66 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs


Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	40.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



TRY10 Commutable





TRY12 Capable





TRY15 Similar



TRY16 Replaceable



TRY33 Exchange


TRY40 Switchable


TRY43 Alteration


TRY46 Additionally


TRY56 Function



TRY58 Standardized



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	6712 oz./y3 (248.89 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


TEM12 Lighthearted



TEM15 Pulse


TEM18 Swing


TEM22 Snappy


TEM44 Animated




TEM47 Bluestreak


TEM52 Sparkling



TEM55 Double Time



TEM58 Cadence


TEM84 Screamin



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Scroll
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	8471 oz./y3 (314.11 kg/m3)
Pattern Repeat	N/A
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



VLT13 Mask



VLT15 Envelop



VLT25 Screen



VLT49 Obscure



VLT55 Shade


VLT56 Shadow


VLT57 Overcast


VLT58 Conceal


VLT76 Spider Web


VLT85 Shield

kinetex

Vestige | KVES

Modular



Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - applied pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	Kinetex Adhesive

Special Technologies


Kinetex ProTex®	Standard


Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Installation Methods: Brick, Ashlar, Quarter Turn

Colorways



VES14 Ashen


VES35 Aquamarine



VES36 Chameleon


VES46 Aniline



VES49 Cobalt


VES53 Steel


VES55 Slate


VES56 Soot


VES59 Blackend


VES78 Walnut



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6558 oz./y3 (243.17 kg/m3)
Pattern Repeat	N/A
Gauge	1/8 (3.15 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Encore® 100 Fiber


Special Technologies


ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional


Environmental Specifications & Tests


NSF 140:	Gold Certified
Total Recycled Content	46.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes


Colorways



VIP45 Personality



VIP49 Figure


VIP51 Superstar


VIP54 Luxurious


VIP59 Celebrity


VIP72 Important


VIP78 Famous



Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	9290 oz./y3 (344.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

WTC11 Bone White

WTC15 Gamboge

WTC33 Sap Green

WTC35 Celadon

WTC37 Turquoise

WTC38 Phthalo Gre..

WTC44 Cerulean

WTC46 Lapiz

WTC47 Ultramarine

WTC49 Dark Cobalt

WTC51 Smoke

WTC54 Payne's Gray

WTC56 Lead Gray

WTC59 Soot Black

WTC68 Rose Madder

WTC76 Raw Sienna

WTC78 Umber

WTC86 Vermillion

WTC88 Scarlet Red

WTC98 Mars Violet



Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	9290 oz./y3 (344.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Optional Adhesive	TileTabs
Standard Warranties	Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Nexus FC Cushion Encore SD Ultima Fiber
Optional Warranties	Advance Modular Backing Nexus Cushion Modular Adhesive Advance Modular Adhesive Tile Tabs Encore® 100 Fiber

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


WTC11 Bone White



WTC15 Gamboge


WTC33 Sap Green


WTC35 Celadon


WTC37 Turquoise


WTC38 Phthalo Gre..


WTC44 Cerulean


WTC46 Lapiz


WTC47 Ultramarine


WTC49 Dark Cobalt


WTC51 Smoke


WTC54 Payne's Gray



WTC56 Lead Gray


WTC59 Soot Black


WTC68 Rose Madder


WTC76 Raw Sienna


WTC78 Umber


WTC86 Vermillion


WTC88 Scarlet Red


WTC98 Mars Violet

EF Contract®

Woodlands II | EFCW2

LVT



Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random Wood
Edge Treatment	Micro-Bevel
Dimensions:	7" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	2.33 / 42
Weight per piece / carton	1.96 (lbs) / 35.28 (lbs)
Pieces per box	18
Boxes per pallet	50

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


001 Ironwood


002 Sequoia


007 Danish Teak


008 Acacia


009 Silver Ash


010 Mocha


011 Tawny Ash


012 Hazel


013 Tamarack


014 Honey Maple

EF Contract®

www.efcontractflooring.com

Work of Art 2.5mm | ECWA2

LVT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 54
Weight per piece / carton	4.11 (lbs) / 49.36 (lbs)
Pieces per box	12
Boxes per pallet	40

Special Technologies


Added Antimicrobial	Yes

Environmental Specifications & Tests


Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes


Colorways




001 Famous



004 Beauty



005 Appreciate



006 Craftsman

Work of Art 5mm | ECWA5

LVT



Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Dimensions:	18" x 36"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies


Added Antimicrobial	Yes

Environmental Specifications & Tests


Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes


Colorways




001 Famous



004 Beauty



005 Appreciate



006 Craftsman