



Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Micro Bead
Pattern Repeat	Random
Edge Treatment	No
Dimensions:	7" x 48"
Standard Adhesive	Commercialon Premium Modular and LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	15 Year LVT

Packaging

Sq.ft. per piece / carton	2.33 / 23.33
Weight per piece / carton	4.28 (lbs) / 42.79 (lbs)
Pieces per box	10
Boxes per pallet	50


Special Technologies

Added Antimicrobial	Yes
---------------------	-----

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes
ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

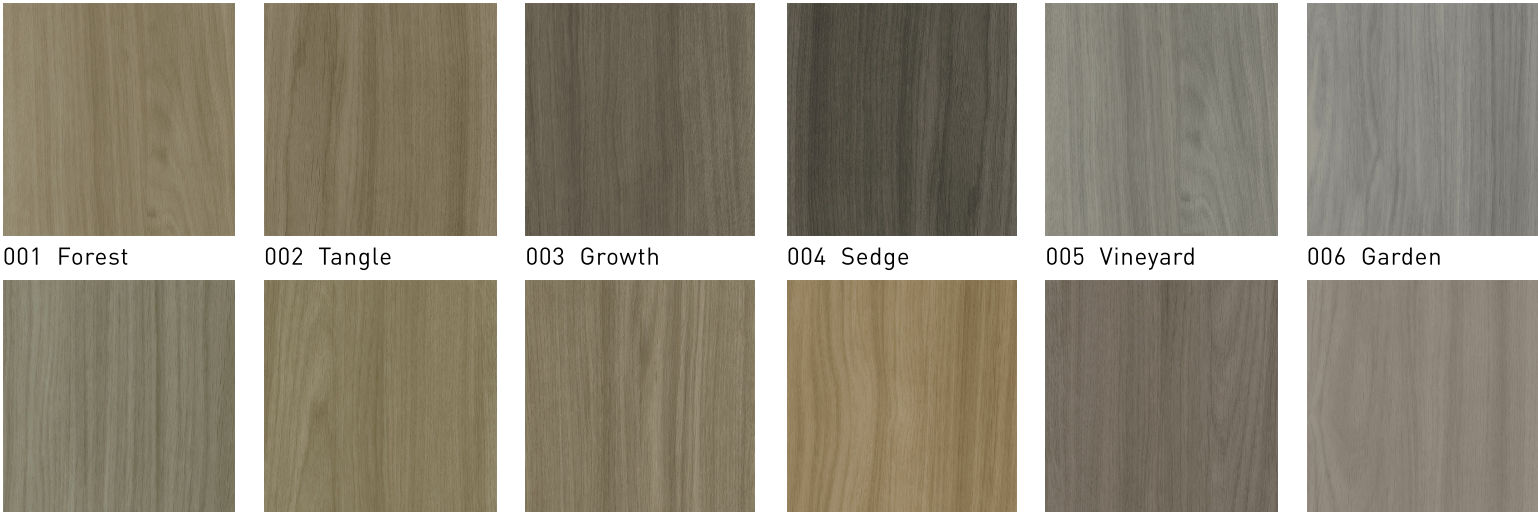

001 Forest 002 Tangle 003 Growth 004 Sedge 005 Vineyard 006 Garden
007 Grove 008 Orchard 009 Brush 010 Understory 011 Shaw 012 Timber